


Installation Instructions FortressAccents 60W Transformer

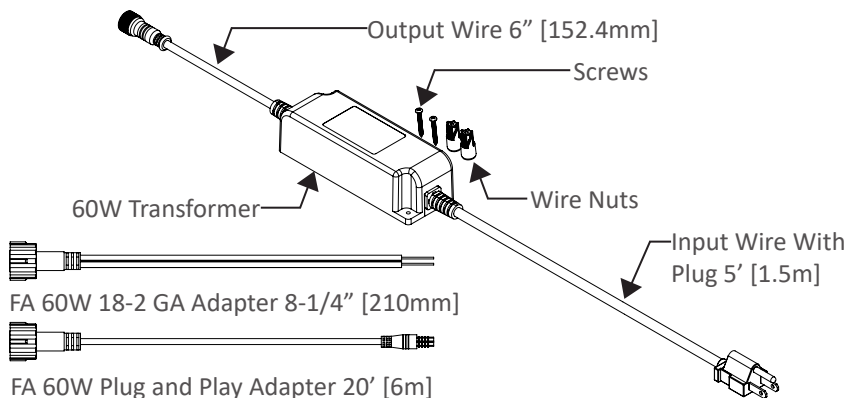

It is the responsibility of the installer to meet all code and safety requirements. The installer should determine and implement the appropriate installation techniques for each situation. Fortress Building Products or its distributors shall not be held liable for improper or unsafe installations.


WARNING – Risk of Electric Shock. Install power unit 10 feet (3.05 m) or more from a pool, spa, or fountain. Where the power unit is installed outdoors, connect power unit to a receptacle protected by a GFCI.

An electronic transformer should always be used to operate FortressAccents LED lighting. FortressAccent transformers are available wherever FortressAccents LED lighting is sold.

Use of a transformer that is not a FortressAccents transformer with FortressAccents LED Lighting will void the warranty.

- **READ INSTALLATION INSTRUCTIONS BEFORE WIRING**
- **NOT FOR USE WITH DIMMERS**
- **FOR OUTDOOR USE ONLY. MOUNT AT LEAST 12" [305mm] ABOVE GROUND**
- **NOT FOR USE WITH SUBMERSIBLE FIXTURES**
- **DO NOT CONNECT TWO OR MORE TRANSFORMERS IN PARALLEL**

Required Materials





INSTALLATION

Step 1: Install Transformer

1. Determine the best location for the transformer based on your lighting layout. The transformer should be located within 15' [4.5m] of the first LED Light. The supplied input wire with plug must be connected to a GFCI protected outlet with a hooded flush type cover plate receptacle marked "Wet Location". **DO NOT** use an extension cord.
2. The Transformer must be installed more than 12" [305mm] above the ground. As shown in Fig. 1.
3. Place transformer in desired location and use the provided screws to mount. As shown in Fig. 2.

Tip:

- If no GFCI protected outlet with a hooded flush type cover plate receptacle marked "Wet Location" is available, a licensed electrical contractor must install a GFCI outlet at the required location.

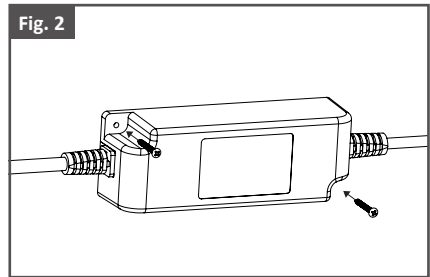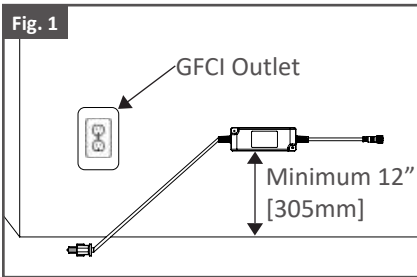

Step 2: Install FA 60W 18-2 GA Adapter or FortressAccents Plug & Play Wire Adapters

1. If installing FortressAccents LEDs with Plug and Play connectors, use the FA 60W Plug and Play Adapter. If installing FortressAccents LEDs with Wire Nuts, use the FA 60W 18-2 GA Adapter. Secure the required adapter to the transformer with the threaded connector. As shown in Fig. 1.
2. If using the FA 60W 18-2 GA Adapter, attach Wire Nuts to both positive and negative outputs. As shown in Fig. 2.
3. If using the FA 60W Plug and Play Adapter, use one of the three connector options to connect the adapter to the LED system As shown in Fig. 3.

Note:

- When connecting FA 60W 18-2 GA Adapter with FortressAccent system, be sure to maintain polarity (positive to positive, negative to negative).
- **Connectors sold separately.**

